



ICEO320 ON B42

## Features

- Space-saving 22" (558 mm) wide design.
- Produces up to 349 lbs (159 kg) of ice per day.
- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Pure Ice® exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.

## Options & Accessories

| WATER FILTERS     |          |             |               |
|-------------------|----------|-------------|---------------|
| Ice Machine Model | Manifold |             | Inline        |
|                   | System   | Replacement | System        |
| ICEO320           | IFQ1     | IOMQ (1)    | IFI4C / IFI8C |
| ICEO325           |          |             |               |

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

## Ice Form



### CUBE

| FULL CUBE DIMENSIONS |                 |
|----------------------|-----------------|
| W x D x H (in.)      | 7/8 x 7/8 x 7/8 |
| W x D x H (mm)       | 22 x 22 x 22    |
| HALF CUBE DIMENSIONS |                 |
| W x D x H (in.)      | 3/8 x 7/8 x 7/8 |
| W x D x H (mm)       | 10 x 22 x 22    |

## Bin Chart Kits for Combining Wider Bins with Smaller Models

| ICE STORAGE BINS |           |                  |                  |                  |                  |                  |                   |                  |                   |                   |                   |
|------------------|-----------|------------------|------------------|------------------|------------------|------------------|-------------------|------------------|-------------------|-------------------|-------------------|
| Kits             | Model No. | B25              | B40              | B42              | B55              | B70-30           | B90-30            | B100             | B120              | B150              | B170              |
|                  | Capacity  | 242 lbs (110 kg) | 344 lbs (156 kg) | 351 lbs (160 kg) | 510 lbs (232 kg) | 741 lbs (337 kg) | 1023 lbs (465 kg) | 854 lbs (388 kg) | 1142 lbs (519 kg) | 1447 lbs (658 kg) | 1807 lbs (821 kg) |
|                  | Width     | 30 in (762 mm)   | 30 in (762 mm)   | 22 in (559 mm)   | 30 in (762 mm)   | 30 in (762 mm)   | 30 in (762 mm)    | 48 in (1219 mm)  | 48 in (1219 mm)   | 60 in (1524 mm)   | 60 in (1524 mm)   |
| ICEO320          |           | KBT 19           |                  | Kit Not Required | KBT 19           | N/A              |                   | N/A              |                   |                   |                   |
| ICEO325          |           | KBT 19           |                  | Kit Not Required | KBT 19           | N/A              |                   | N/A              |                   |                   |                   |

\*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.





ICEO320/O325 CUBE ICE MAKER

### Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.


- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".

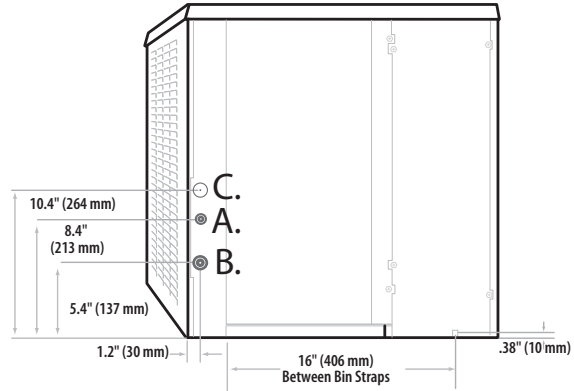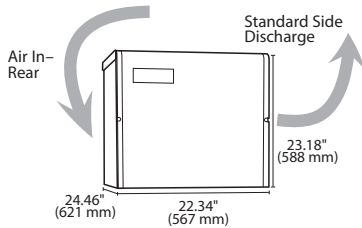

Air Cooled

### Water Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Condenser water in, 3/8" FPT.
- E. Condenser water out, 1/2" FPT.

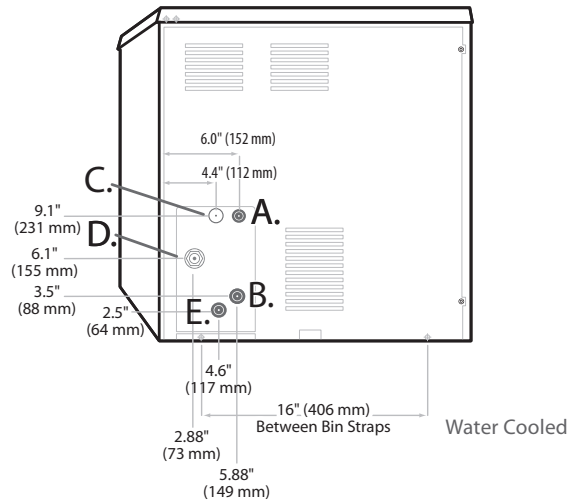

Water Cooled

## Operating Requirements

|                         | MINIMUM           | MAXIMUM           |              |
|-------------------------|-------------------|-------------------|--------------|
|                         |                   | 60 Hz             | 50Hz         |
| Ambient Temp. Range Air | 50°F (10°C)       | 100°F (38°C)      | 110°F (43°C) |
| Water Temp.             | 40°F (4.4°C)      |                   |              |
| Water Pressure          | 20 PSIG (1.4 BAR) | 60 PSIG (4.1 BAR) |              |

## Dimensions

| ALL MODELS      |                       |
|-----------------|-----------------------|
| W x D x H (in.) | 22.34 x 24.46 x 23.18 |
| W x D x H (mm)  | 567 x 621 x 588       |

## Specifications

| Model Number | Cond. Unit | Ice Production per 24hrs     |                              | Water Usage gallons per 100 lbs of Ice 90°F air/70°F water |           | kWH Used per 100 lbs of ice @ 90°F air/70°F water | Voltage Characteristics | Min. Circuit Ampacity | Fuse Size | Approx. BTUs per hour** |
|--------------|------------|------------------------------|------------------------------|--|-----------|---|-------------------------|-----------------------|-----------|-------------------------|
|              |            | 70°F air/50°F water lbs (kg) | 90°F air/70°F water lbs (kg) | Potable  | Condenser |   |                         |                       |           |                         |
| ICEO320A     | Air        | 334 (152)                    | 249 (113)                    | 26.9   | -         | 8.1   | 115/60/1                | 13.2                  | 15        | 6,228                   |
| ICEO320W     | Water      | 349 (159)                    | 308 (140)                    | 27.3   | 157       | 5.3   |                         | 13.1                  |           | 6,115                   |
| ICEO325A     | Air        | 301 (137)                    | 214 (97)                     | 28.3   | -         | 7.2   | 220-240/50/1            | 6.6                   | 16        | 4,990                   |

\*\*BTUH is calculated 0°F Evaporator, 100°F Condensing, and 33 PSIG.

NOTES:  
 Number of Wires: 3 (including ground)  
 Approx. Shipping Weight lbs (kg): ICEO320A 150 (68) • ICEO320W 160 (73) • ICEO325A 150 (68)  
 Refrigerant Type: R404A